
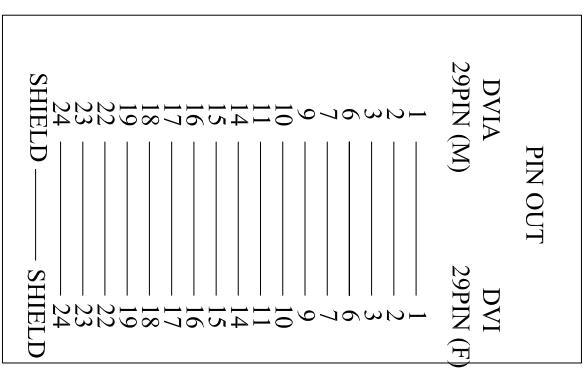
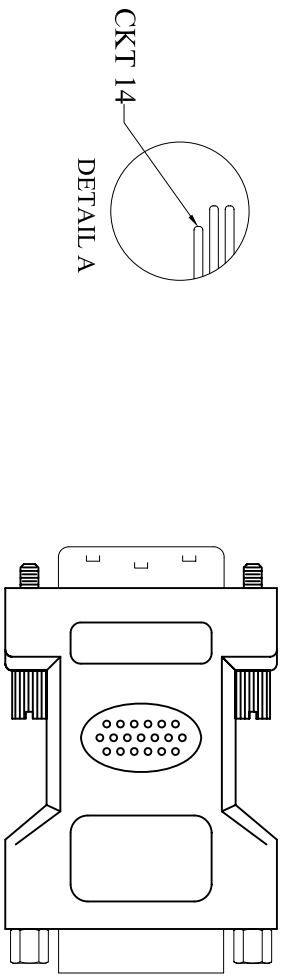


Signature	Revision History	Date	Rev.
Norman Xu	For Bulk production	Dec.20,2005	01

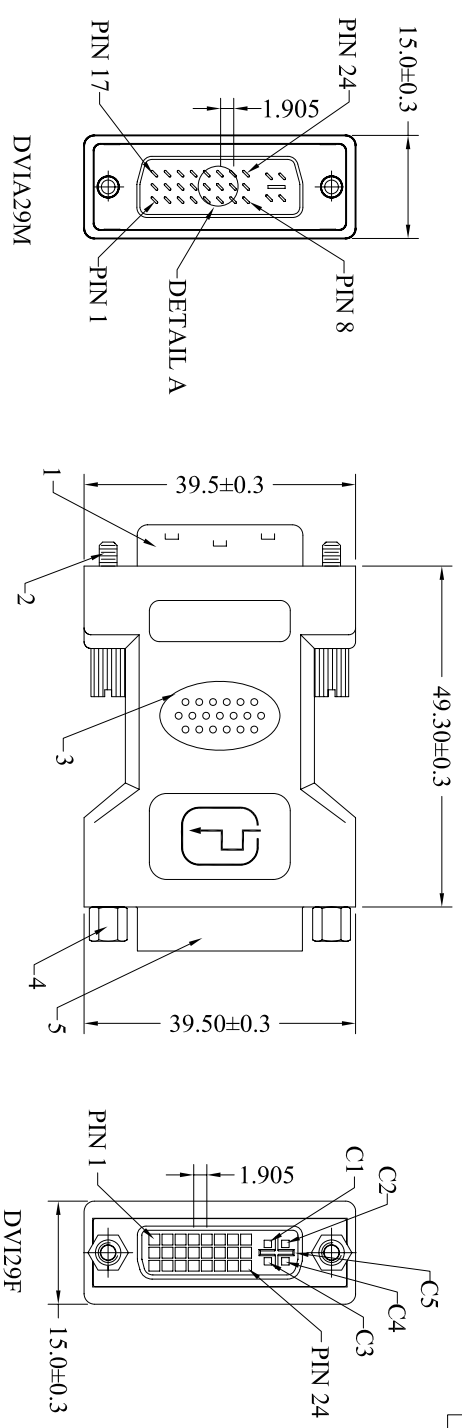

NO.	COMPONENTS	DESCRIPTION	QTY
1	DVI129M	DVI-Integrated 29P Male Connector Insulator: High Temperature Plastic UL-94V-0 Contact: Brass Shell: Steel With Tin Plated 150 " Overm Contact Plating: G/F Selective Plating And Tin/LEAD On Solder Cup All With Nickel Underplating	1
2	Jack Screw	UNC #4-40 Nickel Plated	2
3	Hood	P.V.C Molded Color: Black Inner Molded With Copper Foil Shielded	1
4	Screw Lock	UNC #4-40 Nickel Plated	2
5	DVI129F	DVI-Integrated 29P Female Connector Insulator: High Temperature Plastic UL-94V-0 Contact: Phosphor Bronze Metal Board Lock: Zinc Alloy With Tin Plating 150U" Over Shell: Zinc Alloy With Nickel Plated 150U" Over Contact Plating: G/F Selective Plating And Tin/LEAD On Solder Tail All With Nickel Underplating	1

- 100% OPEN / SHORT / INSULATING TEST
- INSULATION TEST: 5M OHMS.
- PACKING:EACH PC / POLYBAG

Date	Name
Dec.20,2005	Norman Xu
Dec.20,2005	Alex Dan
Dec.20,2005	

Part No.	AB 545
Title:	DVI-I/M - DVI-I/F ADAPTOR
Scale	N/A
Unit	MM
Sheet	1/1

ASSMANN
Electronic GmbH

STR1407

1	2	3	4	5	6	7
1	2	3	4	5	6	7
H	G	F	E	D	C	B
H	G	F	E	D	C	B